

# LAUGFS XT/XT+ TYRES




**LAUGFS XT/XT+ TYRES** are designed to minimize vibration and noise. Objective is to maximize the safety while providing a comfortable ride. It delivers high wear performance resulting in longer tyre life, additional hours of usage, minimum down time and lower maintenance cost.





**XT/XT+**

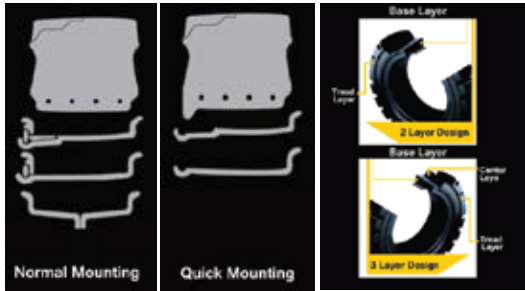

- Huge Lug depth - Increases life and traction
- Massive tread blocks - Increase the stability and grip
- Special compounds - Make this tire the longest lasting tire in the industry for medium intensity applications
- Wear indicator - Ensures maximum tire utilization

RESILIENT TYRES - XT/XT+																
Tyre Size	Rim Size	EASY FIT /Normal	Tread Pattern (Smooth (SM) / Traction (TR) / Rib (R.))	Tyre Dimension				Load Capacity (kg)							Finished tyre weight(kg)	Pcs/20ft
				Inch		mm		Counter balanced lift Trucks		Other Vehicles (Trailers)			Static 0 km/h			
				Max Width	O.D.+/- 2%	Max Width	O.D.+/- 2%	Load Wheels up to 25Km/h	Steering Wheels	Up to 6Km/h	Up to 10Km/h	Up to 25Km/h				
													950	730		
4.00 - 8	3.75 - 8	N	R	4.7	16.0	119	407	950	730	950	860	730	1100	11.50	1400	
4.00 - 8	3.00D - 8	EF/N	TR	4.1	16	104	406	950	730	950	860	730	1100	10.80	1400	
140/55 - 9	4.00E - 09	EF/N	TR	5.2	14.8	131	375	1170	900	1170	1060	900	1360	10.15	1500	
5.00 - 8	3.00D - 8	EF/N	TR	4.7	18.0	120	457	1415	1090	1415	1285	1090	1645	16.00	1100	
15x41/2 - 8 (125/75-8)	3.00D - 8	EF/N	TR	4.5	15.0	115	380	1040	800	1040	945	800	1210	9.90	1600	
16x6 - 8 (150/75-8)	4.33R - 8	EF/N	TR	6.0	16.3	153	414	1495	1150	1495	1350	1150	1735	16.00	1000	
18x7 - 8 (180/70-8)	4.33R - 8	EF/N	TR	6.0	17.9	153	455	2145	1650	2145	1945	1650	2490	20.10	800	
6.00 - 9	4.00E - 9	EF/N	TR	5.4	20.9	136	530	1885	1450	1885	1710	1450	2190	24.80	640	
21x8 - 9 (200/75-9)	6.00E - 9	EF/N	TR	7.3	20.7	185	525	2755	2120	2755	2500	2120	3200	33.50	500	
6.50 - 10	5.00F - 10	EF/N	TR	6.3	22.6	160	573	2340	1800	2340	2125	1800	2720	33.80	480	
200/50 - 10	6.50F - 10	EF/N	TR	7.6	18.1	194	461	2470	1900	2470	2240	1900	2870	24.03	660	
23x9 - 10 (225/75-10)	6.50F - 10	EF/N	TR	8.0	23.3	202	592	3445	2650	3445	3125	2650	4000	46.60	296	
7.00 - 12	5.00S - 12	EF/N	TR	6.7	26.0	170	660	2920	2240	2920	2645	2240	3380	45.60	320	
23x10 - 12 (250/60-12)	8.00G - 12	EF/N	TR	9.1	23.2	231	590	3770	2900	3770	3420	2900	4380	49.50	270	
27x10 - 12 (250/75-12)	8.00G - 12	EF/N	TR	9.8	27.1	248	688	3900	3000	3900	3540	3000	4530	75.90	210	
28x9 - 15 (8.15 - 15 & 225/75-15)	7.00 - 15	EF/N	TR	8.5	27.3	216	694	3770	2900	3770	3420	2900	4380	58.50	264	
28x12.5-15 (355/45-15)	9.75-15	EF/N	TR	11.7	28.2	292	685	5525	4250	5525	5015	4250	6420	84.00	192	
7.00 - 15	5.50 - 15	EF/N	TR	7.0	28.8	179	732	3545	2725	3545	3215	2725	4115	55.10	300	
7.00 - 15	6.00-15	EF/N	TR	7.0	28.8	179	732	3545	2725	3545	3215	2725	4115	56.60	300	
7.50 - 15	5.50 - 15	EF/N	TR	7.9	29.6	200	753	3900	3000	3900	3540	3000	4530	63.40	230	
7.50 - 15	6.00-15	N	TR	7.9	29.6	200	753	3900	3000	3900	3540	3000	4530	64.00	230	
8.25 - 15	6.50 - 15	EF/N	TR	8.3	32.3	210	821	4750	3650	4750	4300	3650	5510	90.50	154	
2.50 - 15 (250/70-15)	7.00 - 15	EF/N	TR	8.8	28.6	223	726	4750	3650	4750	4300	3650	5510	68.40	210	
2.50 - 15 (250/70-15)	7.50 - 15	EF/N	TR	8.8	28.6	223	726	4745	3650	4745	4300	3650	5510	69.80	210	
3.00 - 15 (315/70-15)	8.00 - 15	EF/N	TR	10.0	32.5	255	825	5850	4500	5850	5310	4500	6795	108.60	126	
355/65 - 15 (32 x 12.1-15)	9.75 - 15	EF/N	TR	12.0	32.6	304	828	7800	6000	7000	6430	5450	9060	131.90	98	
7.50-16 (8.25-16)	6.00-16	EF/N	TR	8.2	31.5	208	800	3950	3050	3950	3600	3050	4605	78.80	154	
7.50-16 (8.25-16)	6.00-16	EF/N	SM	8.2	31.5	208	800	3950	3050	3950	3600	3050	4605	81.00	154	
9.00-20	7.00-20	N	TR	9.0	39.0	229	990	5400	4500	5400	4905	4500	6795	123.00	100	
10.00 - 20	7.50 - 20	N	SM	9.7	40.2	247	1020	6000	5000	6000	5450	5000	7550	180.00	90	
10.00 - 20	7.00 - 20	N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	173.20	90	
10.00 - 20	7.50 - 20	EF/N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	175.60	90	
10.00 - 20	8.00-20	N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	177.80	90	
11.00 - 20	7.00 - 20	N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	173.20	90	
11.00-20	7.50 - 20	EF/N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	175.60	90	
11.00 - 20	8.00-20	N	TR	9.9	41.1	251	1045	6000	5000	6000	5450	5000	7550	177.80	90	
12.00 - 20	8.0 - 20	N	TR	11.2	43.2	285	1098	7560	6300	7560	6885	6300	9515	211.00	70	
12.00 - 20	8.5 - 20	N	TR	11.2	43.2	285	1098	7500	6200	7560	6885	6300	9515	212.00	70	
12.00 - 24	8.5 - 24	N	TR	11.2	46.2	285	1180	8040	6700	8040	7305	6700	10115	252.50	64	

